



For remote engine start

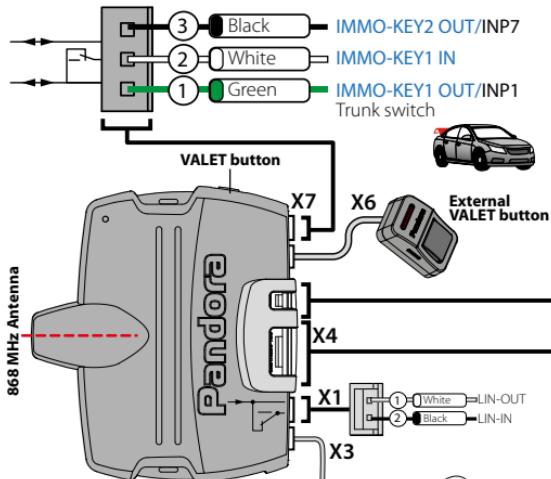


WARNING!
Do not shield built-in
antenna.

Sockets



IT IS FORBIDDEN TO

- connect the system to car wires with normal voltage other than 12V;
 - install a security system with damaged output cables;
 - bypass original fuses of a security system in the installation process.

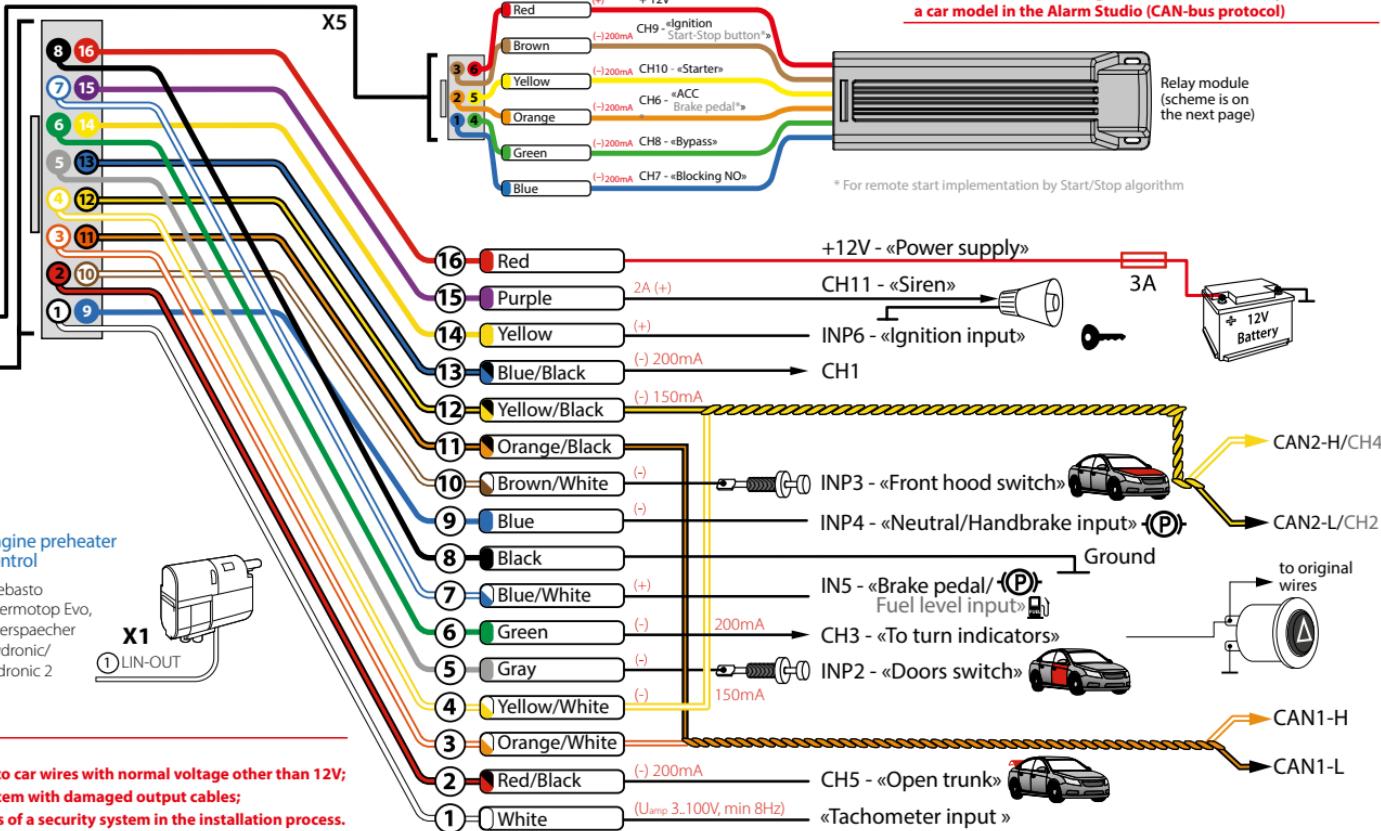

WARNING! Before starting the installation of the system, select a car model in the Alarm Studio (CAN-bus protocol)

Relay module
(scheme is on
the next page)

* For remote start implementation by Start/Stop algorithm

9

1

» (P)

nd

1

1

100

Pandora Light

Pandora

Relay module RMD-5M

